




PLAN VIEW

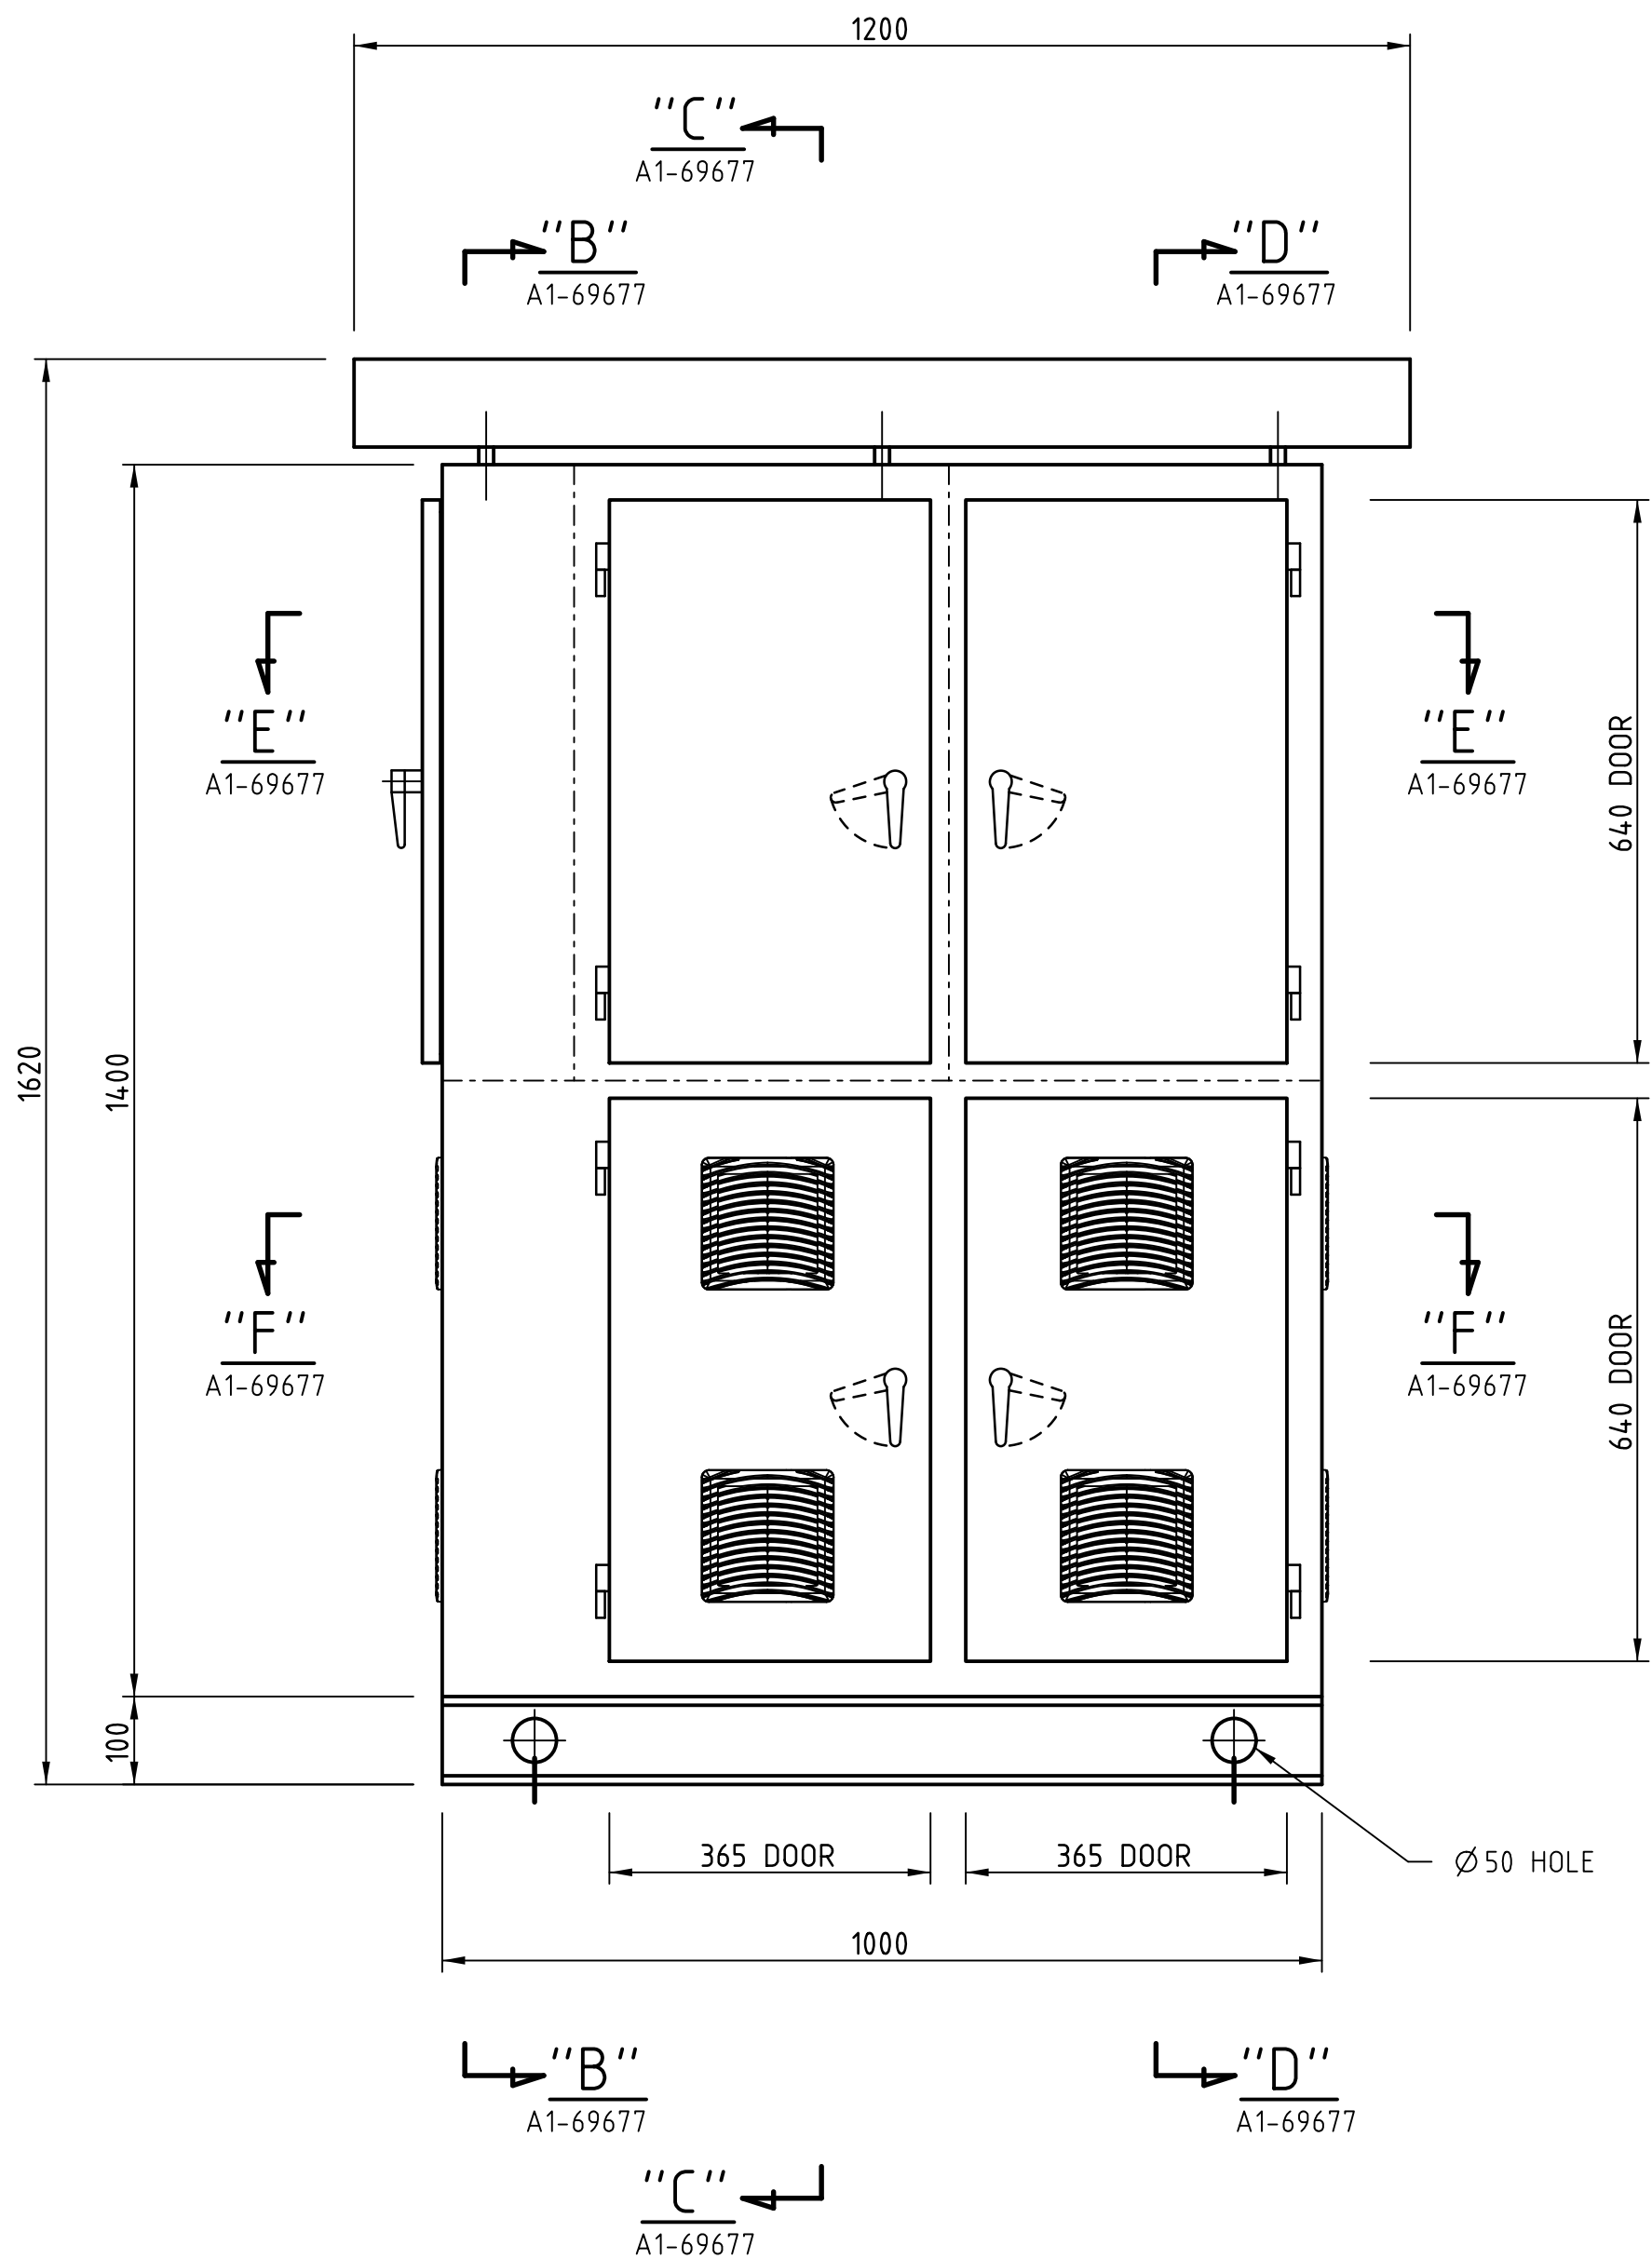

FRONT ELEVATION
(ESCUTCHEON DOORS SHOWN DOTTED)

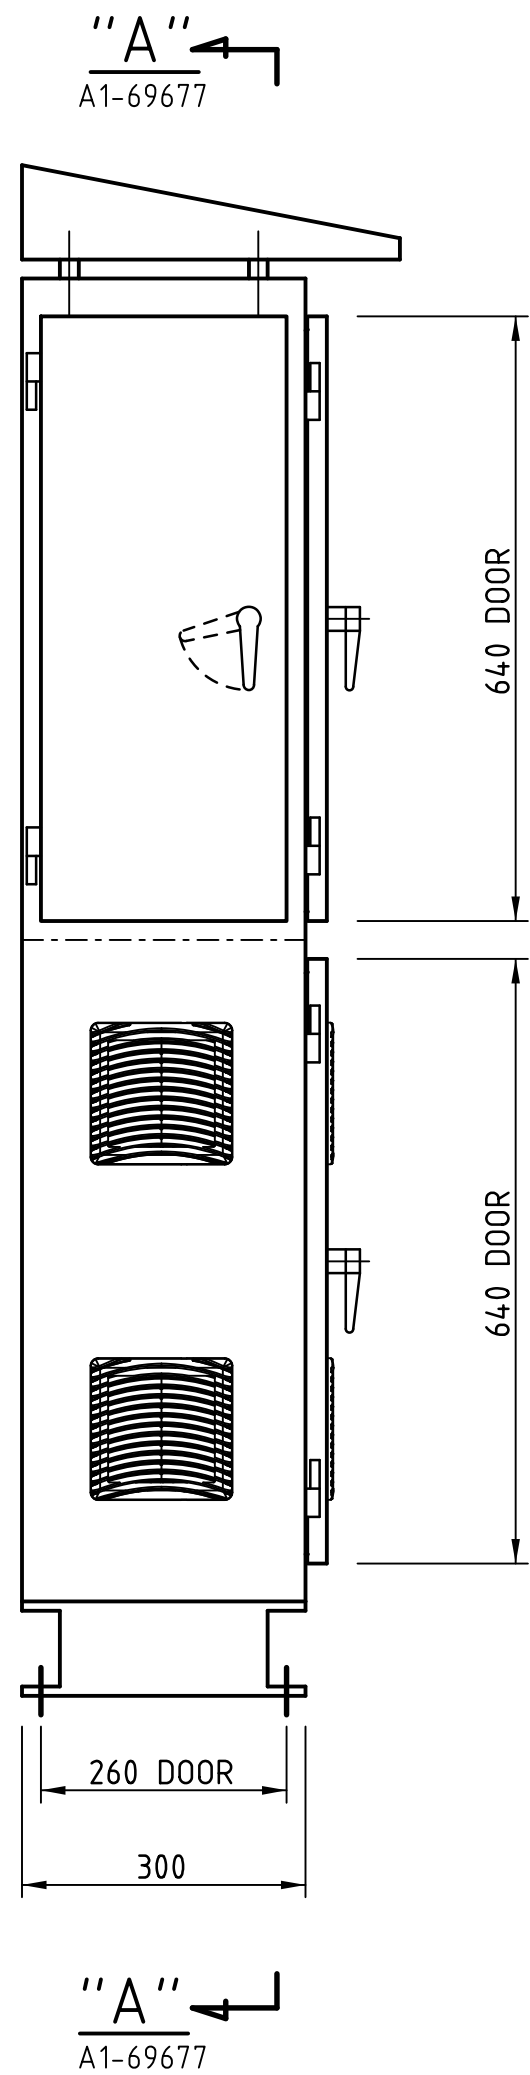

LEFT HAND SIDE
ELEVATION

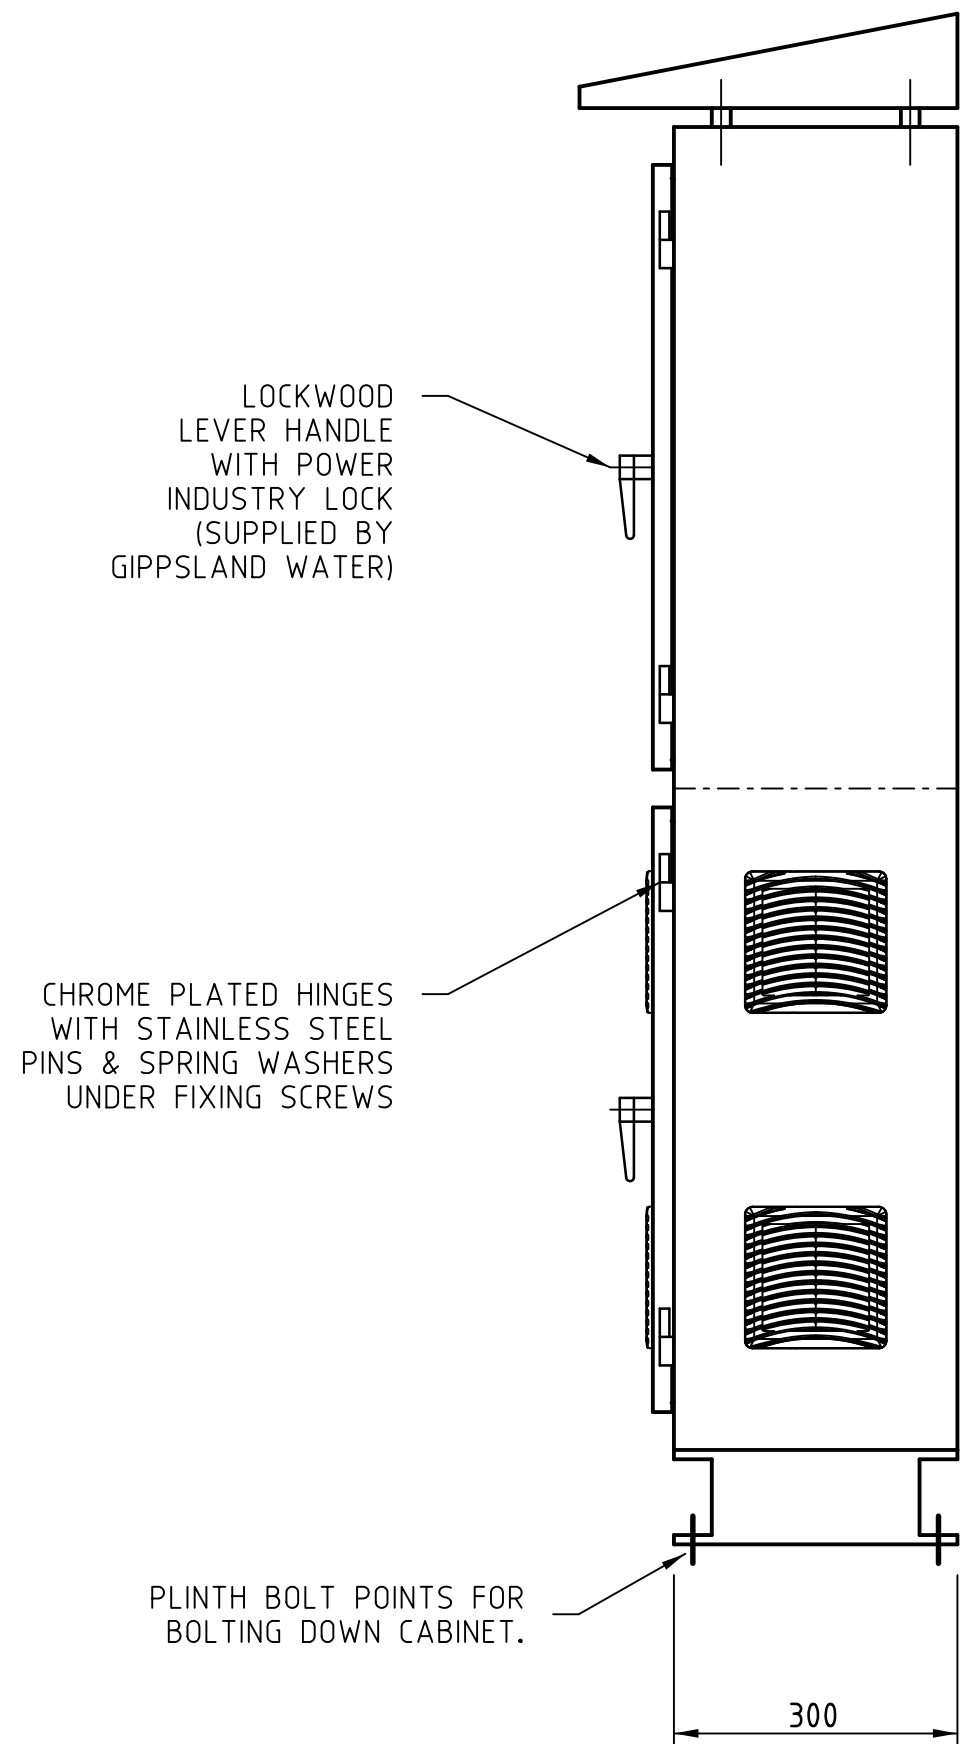

RIGHT HAND SIDE
ELEVATION

CONSTRUCTION NOTES


- MATERIAL:** 3.0mm MARINE GRADE ALUMINIUM.
- FINISH:** TO BE POWDER COATED COLORBOND WILDERNESS GREEN.
- HINGES:** GRADE 316 STAINLESS STEEL HINGES & PINS WITH LOCKING WASHERS UNDER FIXING SCREWS.
- HANDLES:** TO BE SUPPLIED BY CLIENT REQUIRE 3 POINT LOCKING SYSTEM WITH ROLLER ENDS TO BE SUPPLIED BY MANUFACTURER ON DOORS. ALL LOCKS ARE SY3.
- GEAR PLATES:** PUMP No 1 GEAR TRAY - 550mm HIGH x 300mm WIDE
PUMP No 2 GEAR TRAY - 550mm HIGH x 300mm WIDE
INSTRUMENT GEAR TRAY - 550mm HIGH x 200mm WIDE
TO BE POWDER COATED WHITE & FRONT OF GEAR TRAY TO BE 25mm FROM WALL.
- EXTERNAL VENTS:** COSMOTEC VENT KIT.
- PLINTH:** ALUMINIUM PREFORMED CHANNEL CONSTRUCTED IN ONE CONTINUOUS LENGTH.
- GLAND PLATE:** 3.0mm MARINE GRADE ALUMINIUM.
- DOOR SEALS:** 5060 PVC / NITRILE 6mm THICK OR EQUIVALENT.
- DOOR STAYS:** ALL EXTERNAL DOORS TO BE FITTED WITH MECHANICALLY LOCKING ROD TYPE DOOR STAYS TO KEEP DOOR OPEV AT A MINIMUM OF 110 DEGREES.

REVISONS				P.S.	APP'D	REFERENCES		
	No.	DATE	DESCRIPTION				PLAN No.	TITLE
	1	25/1/19	STANDARD DRAWING.			A1-52770	STD SPS - PUMP STN 30kW TO 160kW (VSD) - CT METERED - I & C - DRG INDEX	

DESIGNED BY:



DO NOT SCALE		GIPPSLAND WATER DRAWING STATUS		STANDARD DRAWING		GIPPSLAND WATER FACILITY CODE XXCPXX	
CERTIFICATION OF COMPLIANCE WITH GIPPSLAND WATER'S DESIGN & DRAFTING REQUIREMENTS.		DRAWING No.		REV.			
DESIGNED: 25/01/2019 - STD DRG		A1-69676		1			
DRAWN: 25/01/2019 - OPT/MM							
CHECKED: 25/01/2019 - G FOX							



STANDARD SEWERAGE PUMP STATION
PUMP STATION 55kW TO 160kW (VSD) - CT METERED
JUNCTION BOX QB1EJ01
GENERAL ARRANGEMENT